




DETAIL 'A'
SofTILE Contained By SofRAMP

P.O. BOX 239, 4393 DISCOVERY LINE
PETROLIA, ONTARIO
N0N 1R0
PHONE: (800) 263-2363
PHONE: (519) 882-8799
FAX: (519) 882-2697
EMAIL: allinfo@sosurfaces.com

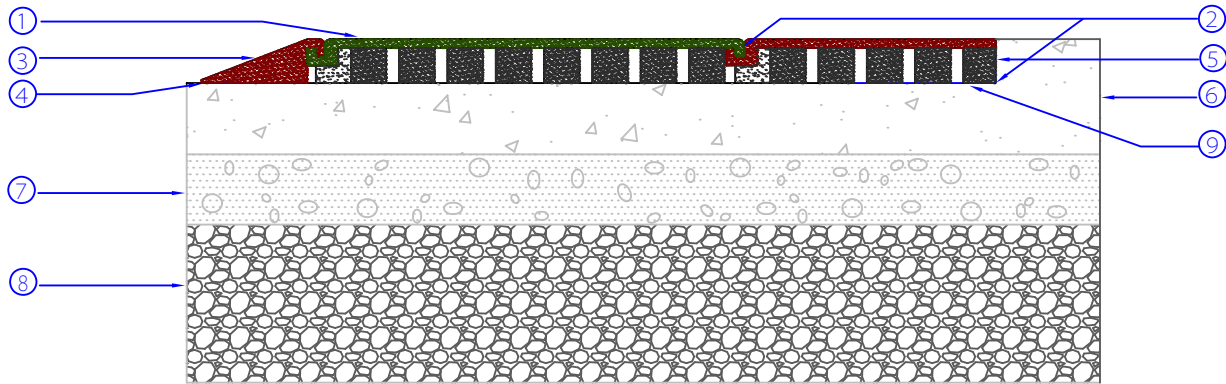

LEGEND:

- ① SofTILE (See Specifications for Depth and Color).
- ② 1/2" Diameter Continuous Bead of SofTILE Adhesive at Each KrosLOCK Joint.
- ③ 1" / 12" (25mm / 300mm) Sloped SofRAMP (ADA) or Standard SofRAMP Jr (See Specifications for Details).
- ④ Apply SofTILE Adhesive to Entire Bottom Edge and locking joint of SofRAMP.
- ⑤ Cut off "Lock" at any Retainer. Use Adhesive on the Retainer, and Under First 12" (300mm) of Perimeter Tiles.
- ⑥ Concrete or Asphalt Base and Curb (See Specifications for Depth and Details).
- ⑦ Compacted Granular A Type I
- ⑧ Compacted Subgrade.
- ⑨ 1.0% Slope - 1/8" / 12" (3mm / 300mm).

THICKNESS	CRITICAL FALL HEIGHT (FT)		REVISIONS				
	WITH 10 YEAR PERFORMANCE WARRANTY	WITH 10 YEAR PERFORMANCE WARRANTY	REV	DESCRIPTION	DATE	APPR	
	PLUS SERIES	PREMIUM SERIES (EPDM)					
2.00"	4.0	4.0	0	ORIGINAL ISSUE UPDATED	02/02/06 06/02/09		
3.00"	5.0	5.0	1				
3.25"	6.0	6.0					
3.50"	7.0	7.0					
4.00"	8.0	8.0					
4.25"	10.0	10.0					
			SIZE	FSCM NO.	DWG NO.	REV	
			A		2000 - 001	1	
File Name	A0001SK1	Prepared By	B.GOSS	SCALE	NTS	SHEET	SK1