




DETAIL 'D' CONCRETE EDGE

BY SofSURFACES Inc.
 P.O. BOX 239, 4393 DISCOVERY LINE
 PETROLIA, ONTARIO
 NON 1R0
 PHONE: (800) 263-2363
 PHONE: (519) 882-8799
 FAX: (519) 882-2697
 EMAIL: allinfo@sosurfaces.com

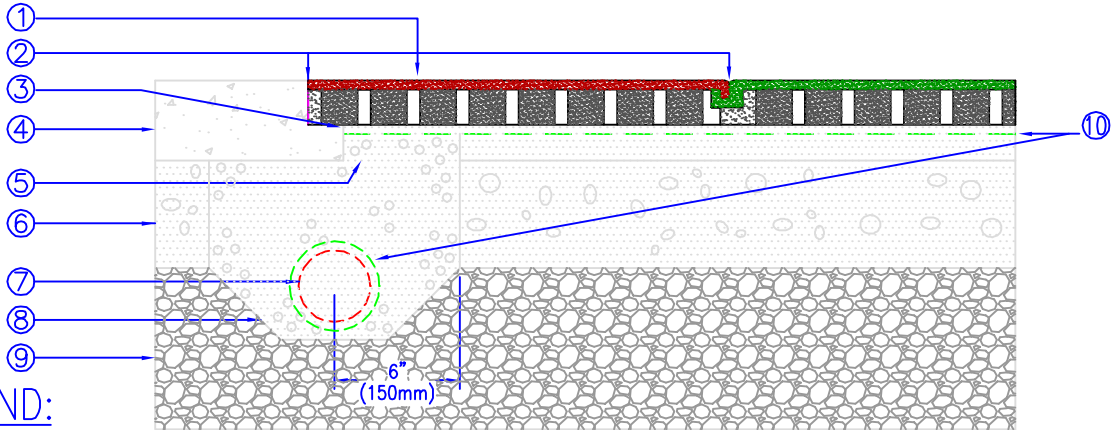

LEGEND:

- ① SofTILE® (See Specifications for Depth and Color).
- ② 1/2" Diameter Continuous Bead of SofTILE Adhesive at Each KrosLOCK Joint. Apply Adhesive to Concrete and SofTILE Edge.
- ③ Minimum 1.0% Slope - 1/4" / 12" (6mm / 300mm).
- ④ Optional Concrete Retainer Lip. Concrete Depth and Strength to Specifications.
- ⑤ Minimum 1/2" (12mm) Fine Crushed Granite Screenings (As Required) to achieve a Max 1/4" (6mm) Variation in Grade. When Measured With a 10' (3m) Straight Edge in any Direction.
- ⑥ Compacted Granular A (Type I) To 95% S.P.D. (See Specifications for Depth).
- ⑦ 4" (100mm) Perforated Plastic or PVC Drain Tile at 16' (4.9m) On Center. Wrap with Geotextile Terrafix 200R.
- ⑧ 3/4" (20mm) Clear Stone.
- ⑨ Compacted Subgrade.
- ⑩ Geotextile Terrafix 200R (or Equivalent) Overlap by 12" (300mm) and Tape Joints.

NOTES:

- 1. Ensure subsoil drains towards perforated drain tile.
- 2. Install perforated drain tile at 16' (4.8m) on center as well as around the perimeter of the SofTILE® installation. Drain to nearest storm collection system.
- 3. Back fill around perforated drain tile with 3/4" (20mm) clear stone to 6" (150mm) radius around drain tile.
- 4. Wrap with Geotextile Terrafix 200R to prevent clogging.

THICKNESS	CRITICAL FALL HEIGHT (FT)		REVISIONS				
	WITH 10 YR PERFORMANCE WARRANTY	WITH 10 YR PERFORMANCE WARRANTY	REV	DESCRIPTION	DATE	APPR	
	PLUS	PREMIUM					
1.75"	3.0	3.0	0	ORIGINAL ISSUE	8/31/04		
2.00"	4.0	4.0	1	UPDATED	10/21/04		
2.25"	5.0	5.0	2	UPDATED	02/02/06		
2.50"	6.0	6.0					
2.75"	7.0	7.0					
3.25"	8.0	8.0					
3.50"	9.0	9.0					
3.75"	10.0	10.0					
FILE NAME A0001SK14			PREPARED BY B.GOSS	SIZE A	FSCM NO.	DWG NO. 2000-001	REV 2
			SCALE	NTS		SHEET SK14	