




DETAIL 'A'
SofTILE Contained By SofRAMP

BY SofSURFACES Inc.
P.O. BOX 239, 4393 DISCOVERY LINE
PETROLIA, ONTARIO
N0N 1R0
PHONE: (800) 263-2363
PHONE: (519) 882-8799
FAX: (519) 882-2697
EMAIL: allinfo@sofsurfaces.com

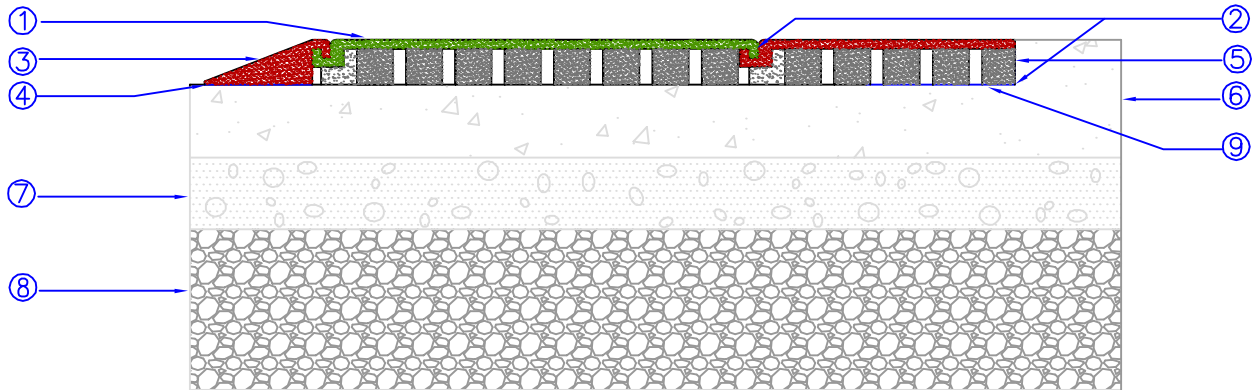

LEGEND:

- ① SofTILE® (See Specifications for Depth and Color).
- ② 1/2" Diameter Continuous Bead of SofTILE Adhesive at Each KrosLOCK Joint.
- ③ 1" / 12" (25mm / 300mm) Sloped SofRAMP® (ADA) or Standard SofRAMP® Jr (See Specifications for Details).
- ④ Apply SofTILE Adhesive to Entire Bottom Edge and locking joint of SofRAMP.
- ⑤ Cut off "Lock" at any Retainer. Use Adhesive on the Retainer, and Under First 12" (300mm) of Perimeter Tiles.
- ⑥ Concrete or Asphalt Base and Curb (See Specifications for Depth and Details).
- ⑦ Compacted Granular A Type I
- ⑧ Compacted Subgrade.
- ⑨ Minimum 1.0% Slope - 1/4" / 12" (6mm / 300mm).

| THICKNESS | CRITICAL FALL HEIGHT (FT) | | REVISIONS | | | | | | | |
|-----------|---------------------------------|---------------------------------|-----------|----------------|----------|-------|------|----------|----------|-----|
| | WITH 10 YR PERFORMANCE WARRANTY | WITH 10 YR PERFORMANCE WARRANTY | REV | DESCRIPTION | DATE | APPR | | | | |
| | PLUS | PREMIUM | | | | | | | | |
| 1.75" | 3.0 | 3.0 | 0 | ORIGINAL ISSUE | 02/02/06 | | | | | |
| 2.00" | 4.0 | 4.0 | | | | | | | | |
| 2.25" | 5.0 | 5.0 | | | | | | | | |
| 2.50" | 6.0 | 6.0 | | | | | | | | |
| 2.75" | 7.0 | 7.0 | | | | | | | | |
| 3.25" | 8.0 | 8.0 | | | | | | | | |
| 3.50" | 9.0 | 9.0 | | | | | | | | |
| 3.75" | 10.0 | 10.0 | | | | | | | | |
| | | | | | | | SIZE | FSCM NO. | DWG NO. | REV |
| | | | | | | | A | | 2000-001 | 0 |
| File Name | A0001SK1 | Prepared By | B.Goss | SCALE | NTS | SHEET | SK1 | | | |