




DETAIL 'B' CONCRETE/ASPHALT BASE

BY SofSURFACES Inc.
 P.O. BOX 239, 4393 DISCOVERY LINE
 PETROLIA, ONTARIO
 N0N 1R0
 PHONE: (800) 263-2363
 PHONE: (519) 882-8799
 FAX: (519) 882-2697
 EMAIL: alltinfo@sofsurfaces.com

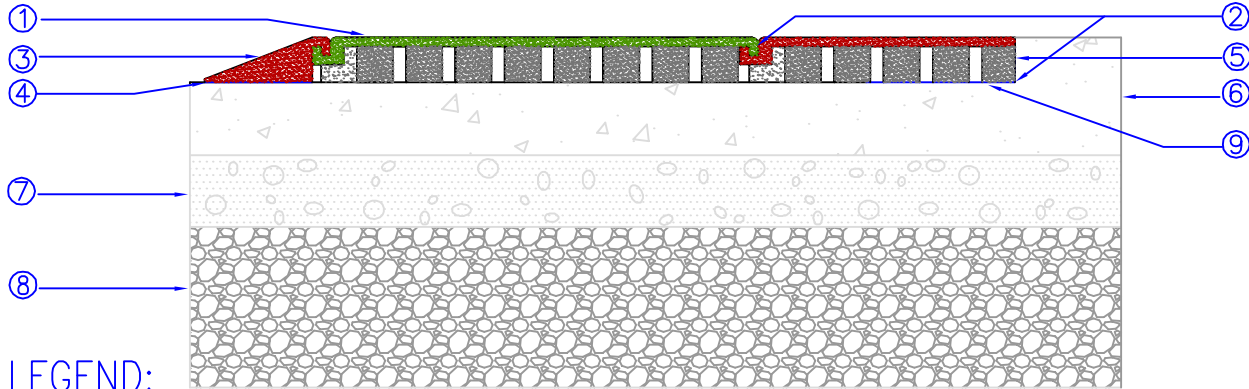

LEGEND:

- ① SofTILE® (See Specifications for Depth and Color).
- ② 1/2" Diameter Continuous Bead of SofTILE Adhesive at Each KrosLOCK Joint.
- ③ 1" / 12" (25mm / 300mm) Sloped SofRAMP® (ADA) or Standard SofRAMP® Jr (See Specifications for Details).
- ④ Apply SofTILE Adhesive to Entire Bottom Edge and locking joint of SofRAMP.
- ⑤ Cut off "Lock" at any Retainer. Use Adhesive on the Retainer, and Under First 12" (300mm) of Perimeter Tiles.
- ⑥ Concrete or Asphalt Base and Curb (See Specifications for Depth and Details).
- ⑦ Compacted Granular A Type I
- ⑧ Compacted Subgrade.
- ⑨ Minimum 1.0% Slope - 1/4" / 12" (6mm / 300mm).

NOTES:

1. Test surface grade using a water flood coat. Repair areas of standing water in excess of thickness of 1/4" (6mm).
2. Install 3/4" (50mm) weeping holes every 3' at lowest point of slope.
3. Allow the following cure times:
 - Asphalt/Concrete base - No Perimeter Solid coat adhesive - 5 Days/5 Days.
 - Asphalt/Concrete base - Perimeter Solid coat adhesive - 21 Days/28 Days.
4. On asphalt surfaces with a solid adhesive coat:
 - Do not use diesel fuel to lubricate paving equipment. Use soapy water.
 - Do not refuel paving equipment on asphalt surface area to be covered with adhesive.

THICKNESS	DROP HEIGHT (FT)		REVISIONS				
	WITH 10 YR PERFORMANCE WARRANTY	WITH 10 YR PERFORMANCE WARRANTY	REV	DESCRIPTION	DATE	APPR	
1.75"	PLUS 3.0	PREMIUM (EPDM) 3.0	0	ORIGINAL ISSUE	8/30/04		
2.00"	4.0	4.0	1	UPDATED	10/21/04		
2.25"	5.0	5.0	2	UPDATED	8/30/05		
2.50"	6.0	6.0	3	UPDATED	02/02/06		
2.75"	7.0	7.0					
3.25"	8.0	8.0					
3.5"	9.0	9.0					
3.75"	10.0	10.0	SIZE A	FSCM NO.	DWG NO. 2000-001	REV 3	
FILE NAME	A0001SK12	PREPARED BY	B.GOSS	SCALE	NTS	SHEET	SK12